



## Dektite<sup>®</sup> Combo

Flash over or around.  
A standard Dektite and  
Retrofit all in one



- Suitable for both standard and retrofit applications  
When retrofit is required just cut and apply clips for ease of application  
Clips included in purchase
- Larger square base will cover a larger opening  
So more forgiving for penetration openings and allows for steeper roof pitch
- Unique cone design  
Provides 10mm (½") continuous contact with flashed pipe providing a watertight seal
- Clear markings in metric and imperial measures  
Makes for easier cutting to pipe size
- Size ranges - Numbers 1-10  
Available in Black and Grey EDPM, and red silicone
- Twenty year warranty  
Just fit it and forget it - we've got you covered

# Combo Selection Guide

Code	Description	Pipe mm	Pipe Inches	Roof Pitch	Base mm	Base Inches	Colours
DC101C	Dektite Combo #1	5-60mm	¼ - 2 ½"	0-40° or 10/12	139 x 139mm	5 ½ x 5 ½"	Black (EPDM) Grey (EPDM) Red Silicone
DC102C	Dektite Combo #2	45-85mm	1 ¾ - 3 ¼"	0-40° or 10/12	177 x 177mm	7 X 7"	Black (EPDM) Grey (EPDM) Red Silicone
DC103C	Dektite Combo #3	5-127mm	¼ - 5"	0-40° or 10/12	221 x 221mm	8 ¾ x 8 ¾"	Black (EPDM) Grey (EPDM) Red Silicone
DC104C	Dektite Combo #4	75-175mm	3-7"	0-40° or 10/12	285 x 285mm	11 ¼ x 11 ¼"	Black (EPDM) Grey (EPDM) Red Silicone
DC105C	Dektite Combo #5	108-190mm	4 ¼ - 7 ½"	0-40° or 10/12	366 x 366mm	14 ¼ x 14 ¼"	Black (EPDM) Grey (EPDM) Red Silicone
DC106C	Dektite Combo #6	125-230mm	5-9"	0-40° or 10/12	366 x 366mm	14 ¼ x 14 ¼"	Black (EPDM) Grey (EPDM) Red Silicone
DC107C	Dektite Combo #7	150-280mm	6-11"	0-40° or 10/12	454 x 454mm	17 ¾ x 17 ¾"	Black (EPDM) Grey (EPDM) Red Silicone
DC108C	Dektite Combo #8	175-330mm	7-13"	0-40° or 10/12	454 x 454mm	17 ¾ x 17 ¾"	Black (EPDM) Grey (EPDM) Red Silicone
DC109C	Dektite Combo #9	240-508mm	9 ½-20"	0-40° or 10/12	705 x 705mm	27 ¾ x 27 ¾"	Black (EPDM) Grey (EPDM) Red Silicone
DC110C	Dektite Combo #10	400-750 mm	15 ¾-29 ½"	0-40° or 10/12	995 x 965mm	39 ¼ x 38"	Black (EPDM) Grey (EPDM) Red Silicone
DC Clips	Combo Clips Twin	25 Twins					

## Available in Black and Grey EPDM or Red Silicone

EPDM will withstand constant temperatures at the roofline of -50°C (-58°F) to 115°C (239°F) and up to 150°C (302°F) intermittently

Red Silicone will withstand constant temperatures at the roofline of -50°C (-58°F) to 200°C (392°F) and up to 250°C (482°F) intermittently

**Please Note** That the outside temperature of the pipe may be significantly different to the exit temperature of the appliance.

# Combo Square Selection Guide

Code	Description	Pipe mm	Pipe Inch	Roof Pitch	Sq Base mm	Sq Base Inches	Colours
DCS103	Dektite Combo Square	20-125 mm	¾-5"	0-40° or 10/12	221 x 221mm	8¾ x 8¾ mm	Black (EPDM)*


## Installation Instructions

### Standard Application

1. Trim the cone to suit pipe size using tin snips
2. Slide down pipe using water as a lubricant
3. Apply sealant on underside of flexible aluminium base
4. Press base to the roof profile by hand. Smooth out any awkward creases. Don't fully extend to allow for vibration
5. Fasten using self sealing fasteners or pop (sealed) rivets

### Retrofit Application

1. Trim cone to suit pipe size then cut seam and aluminium base using tin snips
2. With seam in downstream position wrap cone around pipe and engage 1st double clip at top of seam using multigrips
3. Engage remaining clips working down from top of cone to base
4. Apply sealant to outside of seam closure and to underside of Dektite Combo and shape to roof by hand
5. Fasten flashing down by placing a fastener either side of seam first then secure rest of base
6. Apply sealant to top of base closure and other potential leak areas

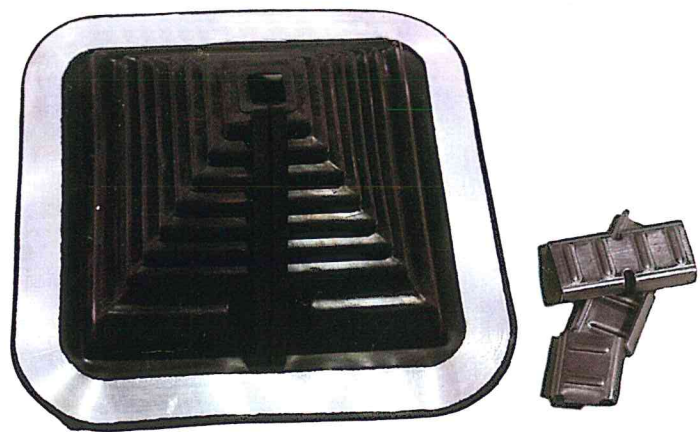

- Always use the neutral cure low modulus silicone for sealing
- In corrosive and coastal environments fix using blind aluminium rivets

### Clips included

**Need to flash a tiled roof? Contact DEKS to discuss the tile roof flashing range.**